
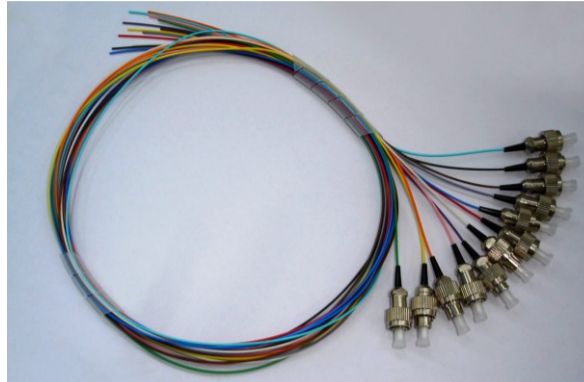


Multi Fiber Fan out Fiber Optic Pigtail

Remarks: Both Ribbon and Bundle ,Single mode and Multi mode ones available. we can make cable assemblies as per requirement,for detailed inquiry please contact our sales.

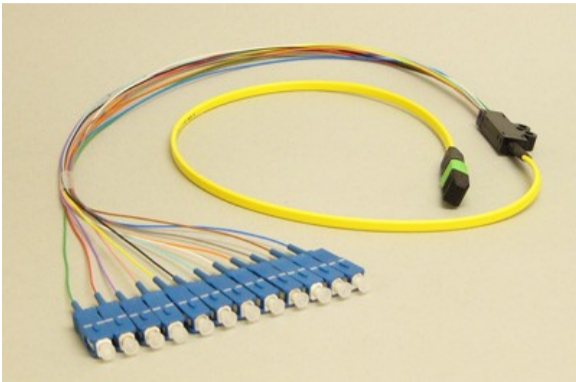

Features

Used to terminate outside plant or riser ribbon cables and between trays within racks where their compact design minimizes cable density and storage requirements.

Fanout assemblies may be ordered as assemblies (terminated on both ends) or as pigtails (terminated one end only).

Number of fibers: 4, 6, 8 or 12 (more than 12 counts are available upon request)

Specifications for Typical single mode fan-out pigtails

Connector types available	SC/ST/FC/LC/MTP/MPO/MTRJ/E2000/MU,etc,optional on request
Typical insertion loss(dB)	<=0.2dB
Max insertion loss(dB)	0.3dB
Repeat ability	<=0.1dB
Interchange ability	<=0.2dB
Return loss	>=45dB(UPC),>=60dB(APC)
Industry standard	Telcordia GR-326-CORE

For detailed inquiry please contact our sales team at: sales@HuihongFiber.com .