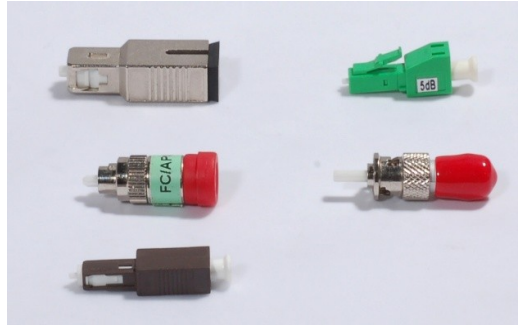


ST Fiber optic attenuator**ST/UPC fiber attenuator****ST APC fiber attenuator****Other plug type attenuator,SC,FC,ST,LC,MU types,UPC,APC types available.****ST Fiber Optic Attenuators Applications**

Low Insertion Loss Deviation
Fiber Optic Communication Systems
Variable of attenuation ways and a bound of connector types
Fixed Type
Local Area Networks (LAN)

ST Fiber Optic Attenuators Specifications

Attenuation Range: 0-30dB
Available Wavelengths: 1310nm or 1550nm
Fixed attenuation value: 1\2\3\5\10\15\20dB or optional
Return Loss: ≥ 50 dB (SPC) or ≥ 60 dB (APC)
Polarization Dependent Loss: ≤ 0.2 dB
Temperature Range: -40 ~ 80° C
Humidity Range: +/- 0.2 dB Change in 10% to 90% relative
Vibration: ≤ 0.1 dB change between 10Hz to 55Hz
Drop: +/- 0.2dB after 8 drops (3 axes) from 1.8 meters onto a hard surface

For detailed inquiry please contact our sales team at: sales@huihongfiber.com .